

4600 PLUS


Lift & Slide

The 4600 Plus Lift&Slide from Cortizo covers large openings while ensuring exceptional thermal insulation. Its 80 mm deep sashes and special polyamides achieve a U_w transmittance of just $0.65 \text{ W/m}^2\text{K}$, one of the best thermal performances among sliding systems. The perimeter interlock profile is reduced to 120 mm, with a slim 50 mm interlock option, enhancing the entry of natural light.

FEATURES

Transmittance		U_w from $0.65 \text{ W/m}^2\text{K}$
Acoustic insulation		R_w up to 43 dB
Air permeability		Class 4
Watertightness		Class E750*
Wind resistance		Class C5**

*Reference test $4.0 \times 2.5 \text{ m}$ / 1 sash + 1 fixed light · **Reference test $4.0 \times 2.5 \text{ m}$ / 2 sashes

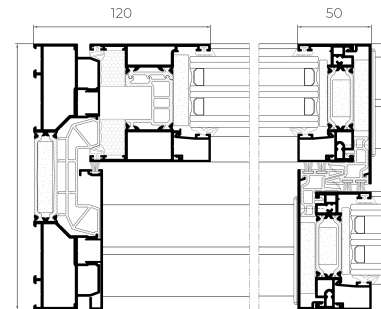

OPENING POSSIBILITIES



Sliding Configurations

1 rail: 1 sash + 1 fixed light
2, 3 & 4 rails
90° opening without mullion

Sightlines

Frame 180 / 280 / 380 mm, Sash 80 mm

Slim Interlock

Reduced 50 mm section option

Glazing

Max. 65 mm, Min. 22 mm

Maximum Sash Dimensions

Width (L) 3300 mm, Height (H) 3500 mm

Maximum Sash Weight

400 kg

Consult maximum weight and dimensions according to typologies.

Sliding

Thermally broken

