

CRYSTAL VIEW PLUS

Reinforced Glass Balustrade

Aluminium System

Glass balustrade




A reinforced glass balustrade system for large openings by Methodo. Crystal View Plus withstands loads of up to 3.0 kN/m – suitable for all use zones of CTE DB SE-AE and Eurocode 1, depending on the configuration. The extruded aluminium base profile carries laminated double glazing up to 1100 mm above floor level, mounted on the slab or the slab edge in four configurations, and classified Class A – Excellent.


FEATURES

Classification	Class A – Excellent*
Maximum Load	Up to 3.0 kN/m
Maximum Height	1100 mm
Glazing	Laminated double, 12 options
Glass	Tempered, 6 / 8 / 10 mm
Mounting	On slab or slab edge, 4 options

*UNE 85240. Tests according to UNE 85237, UNE 85238, UNE 85240, CTE (DB SU-1, DB SE-AE) and Eurocode 1 (EN 1991-1-1).
Reference test: 1100 x 1500 mm above ground level · **Use areas depending on the configuration.

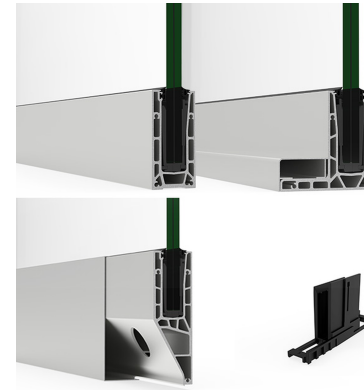

INSTALLATION POSSIBILITIES

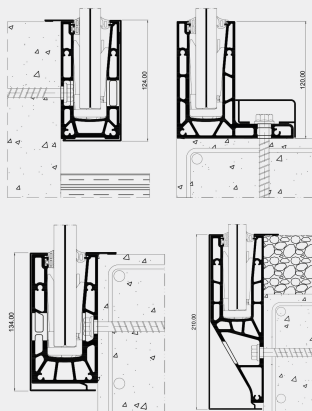

Use Areas (CTE)

A, B, C, D, E, F**

Use Areas (Eurocode 1)

A, B, C, D, E**

Mounting Options

On slab, on slab edge, flush on slab edge, inverted slab edge

Glass Interlayers

Up to 4 polyvinyl butyrals of 0.38 mm

Recommended

Tempered glass



Glazing compositions:

10-1.52-10 · 10-1.14-10 · 10-0.76-10 · 10-0.38-10 · 8-1.52-8 · 8-1.14-8
8-0.76-8 · 8-0.38-8 · 6-1.52-6 · 6-1.14-6 · 6-0.76-6 · 6-0.38-6